

B-cube 6




Professional equipment for preparing cold creams, sorbets, and granitas. Available in Easy (mechanical regulation) and ETC (electronic control) versions.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

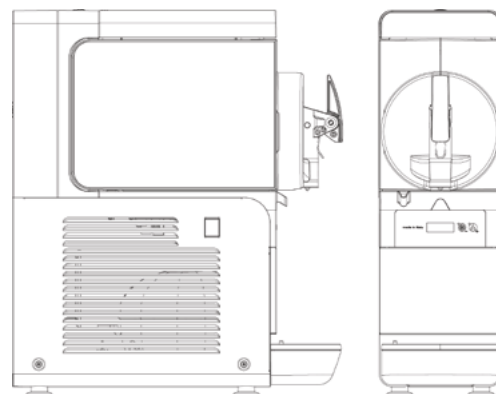

Technical Specifications	B-cube 6.1	B-cube 6.2	B-cube 6.3
Capacity (L)	6	12	18
Height (cm)	60	60	60
Width (cm)	19	39	60
Depth (cm)	52	52	52
Net weight, approx. (Kg)	24	38	50
Gross weight, approx. (Kg)	26	40	52
Power * (W)	350	500	800
Gas (230V 50Hz)	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.		

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB (A)
E-COAT: for energy savings and reduced condensation	R290 gas models: equipped with ATEX electrical components
POM plastic stirrer	Hermetic compressor with protector
Painted steel body	Pre-equipped for tap lock
Air-cooled condenser	Easy to disassemble and clean
Lid unlocking button	Day/night function (production/maintenance mode)
Fixed-speed gear reducer	Intuitive control panel (ETC version)
Patented magnetic transmission	Product temperature control (ETC version)
	Product temperature display (ETC version)
	Product temperature alarm (ETC version)

Optional Accessories	
Container/lid unlocking with key	Customizable flavor marker
Product lighting	

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.brasmilano.com

We reserve the right to make changes without prior notice.