

FBM


Professional equipment for preparing granitas and sorbets.
Available in models with 1 to 3 tanks.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

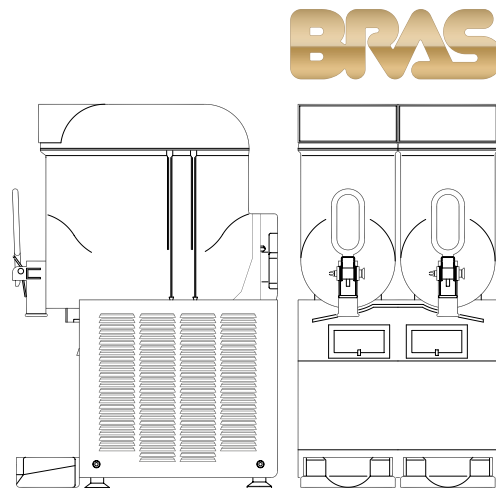

Technical Specifications	FBM 1P	FBM 2	FBM 3
Capacity (L)	10	20	30
Height (cm)	70	70	70
Width (cm)	28	36	54
Depth (cm)	48	48	48
Net weight, approx. (Kg)	25	39	53
Gross weight, approx. (Kg)	28	42	56
Power * (W)	400	800	1100
Gas (230V 50Hz)	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.		

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB (A)
POM plastic stirrer	R290 gas models: equipped with ATEX electrical components
Stainless steel body	Hermetic compressor with protector
Condensatore raffreddato ad aria	Mechanical product density control
Air-cooled condenser	Mechanical product temperature control
Fixed-speed gear reducer	Pre-equipped for tap lock
Patented magnetic transmission	Easy to disassemble and clean
Illuminated cap and product lighting	Day/night function (production/maintenance mode)

Optional Accessories	
Painted steel body	Water-cooled condenser system
Automatic refill system (Autofill)	Timer for day/night function

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.brasmilano.com

We reserve the right to make changes without prior notice.