

# Maestrale Extra P

**BRAS**


Professional equipment for beverage refrigeration. Available in models with 1 to 3 tanks with capacities of 12 or 20 liters. Fountain pump model (P version).

## Certifications



## Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

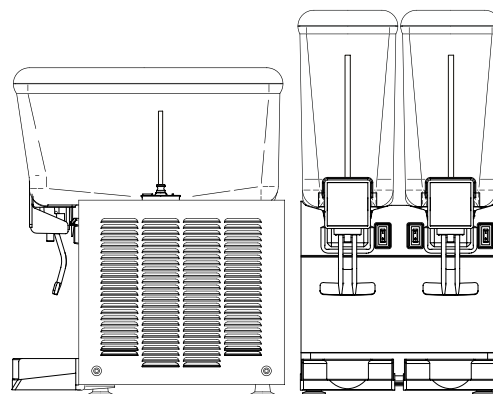

Technical Specifications	Extra 12.1	Extra 12.2	Extra 12.3	Extra 20.1	Extra 20.2	Extra 20.3
Capacity (L)	12	24	36	20	40	60
Height (cm)	57	57	57	67	67	67
Width (cm)	18	36	54	18	36	54
Depth (cm)	48	48	48	48	48	48
Net weight, approx. (Kg)	17	23	37	18	26	42
Gross weight, approx. (Kg)	19	26	40	20	29	45
Power * (W)	200	500	750	200	500	750
Gas (230V 50Hz)	R290	R290	R290	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.					

\* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB (A)
POM plastic stirrer	R290 gas models: equipped with ATEX electrical components
Stainless steel body	Hermetic compressor with protector
Air-cooled condenser	Internal mechanical product temperature control
Rubber tap	Easy to disassemble and clean
Magnetic drive mixing	

Optional Accessories	
Gravity tap	Gravity tap with stirrer
Product lighting	Illuminated cover

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - [www.milanodispensers.com](http://www.milanodispensers.com) - [www.brasmilano.com](http://www.brasmilano.com)

We reserve the right to make changes without prior notice.