

Maestrale Jolly


Professional equipment for the refrigeration of beverages.
Available in versions with 1 to 3 tanks, with a capacity of 5 or 8 liters.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

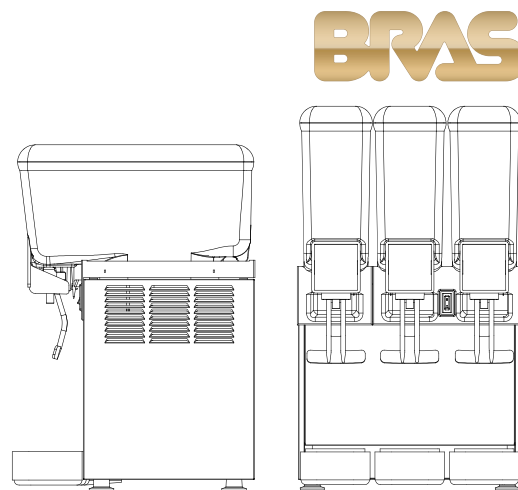

Technical Specifications	Jolly 5.1	Jolly 5.2	Jolly 5.3	Jolly 8.1	Jolly 8.2	Jolly 8.3
Capacity (L)	5	10	15	8	16	24
Height (cm)	55	55	55	62	62	62
Width (cm)	18	25	37	18	25	37
Depth (cm)	39	39	39	41	41	41
Net weight, approx. (Kg)	13	17	22	14	17	22
Gross weight, approx. (Kg)	14	18	24	15	19	24
Power * (W)	250	350	550	250	350	550
Gas (230V 50Hz)	R290	R290	R290	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.					

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB(A)
Stainless steel bodywork	Models with R290 gas: equipped with ATEX electrical components
Air-cooled condenser	Hermetic compressor equipped with a protector
Rubberized tap	Mechanical temperature control (internal)
Magnetic drag mixing	Ease of disassembly and cleaning

Optional Accessories

Gravity tap

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.brasmilano.com

We reserve the right to make changes without prior notice.